



European ATM Service Description for the AirportMETForecast Service

Document information

Project Title	Information Service Modelling deliverables
Project Number	08.03.10
Project Manager	NORACON
Deliverable Name	European ATM Service Description for the AirportMETForecast Service
Deliverable ID	D65
Edition	00.02.01
Template Version	02.00.02

Task contributors

DFS, EUROCONTROL, NORACON, NATMIG, FINMECCANICA, FREQUENTIS, THALES, ENAIRE, DSNA, INDRA, SEAC and ENAV

Abstract

The *AirportMETForecast* service covers the dissemination of customized airport meteorological Forecasts over SWIM. This service therefore aims at bringing the benefits of increased interoperability via SWIM to the MET Community of Interest. Service design has been performed in the context of Service Activity SVA003 entailing Airport Meteorological and Surface Contamination services.

Authoring & Approval

Prepared By - <i>Authors of the document.</i>		
Name & Company	Position & Title	Date
██████████ FINMECCANICA	██	

Document History

Edition	Date	Status	Author	Justification
00.00.01	15/05/2014	Draft	██████████	New document
00.01.00	29/05/2014	Final		Updated to reflect T5 member's external review and ██████ internal review
00.01.01	30/11/2015	Final		Changed delivery ID
00.02.00	09/05/2016	Final		Updated to ISRM Foundation 00.07.00 and based on requirements for ISRM 2.0
00.02.01	20/07/2016	Final update		Updated according to 08.03.10-D65_SJU_Assessment_report_reponse

Intellectual Property Rights (foreground)

This deliverable consists of SJU foreground.

Table of Contents

EXECUTIVE SUMMARY	6
1 INTRODUCTION.....	7
1.1 PURPOSE OF THE DOCUMENT.....	7
1.2 INTENDED READERSHIP.....	7
1.3 INPUTS FROM OTHER PROJECTS.....	7
1.4 GLOSSARY OF TERMS.....	7
1.5 ACRONYMS AND TERMINOLOGY	7
1.5.1 Acronyms.....	7
1.5.2 Terminology.....	9
2 SERVICE IDENTIFICATION.....	10
3 OPERATIONAL AND BUSINESS CONTEXT	11
3.1 INFORMATION EXCHANGE REQUIREMENTS.....	11
3.2 OTHER REQUIREMENTS.....	12
3.2.1 Non-Functional Requirements	12
3.2.2 Relevant Industrial Standards.....	12
3.2.3 Nodes.....	13
4 SERVICE OVERVIEW	14
4.1 SERVICE TAXONOMY	14
4.2 SERVICE LEVELS (NFRs)	14
4.3 SERVICE FUNCTIONS AND CAPABILITIES.....	14
4.4 SERVICE INTERFACES.....	15
5 SERVICE INTERFACE SPECIFICATIONS	16
5.1 SERVICE INTERFACE AIRPORTMETFORECASTPROVIDER	16
5.1.1 Service Interface Definition AirportMETForecastPublisher.....	16
5.1.2 Service Interface Definition AirportMETForecastSubscriber.....	17
6 SERVICE DYNAMIC BEHAVIOUR	24
6.1 SERVICE INTERFACE AIRPORTMETFORECASTPROVIDER	24
7 SERVICE PROVISIONING (OPTIONAL)	25
8 VALIDATION AND VERIFICATION	26
8.1 VERIFICATION.....	26
8.1.1 Verification Results.....	26
8.2 VALIDATION.....	26
9 REFERENCES.....	27

List of tables

Table 1: Service Interfaces	15
Table 2: Payload elements for the subscribeToAirportMETForecast operation	16
Table 3: Payload elements for the unsubscribeFromAirportMETForecast operation	16
Table 4: Payload tracing to AIRM	23

List of figures

Figure 1: NAV AirportMETForecast Service Requirements Traceability IER Diagram	12
Figure 2: NOV-2 AirportMETForecast Service to Nodes Mapping diagram	13
Figure 3: NSOV-4 AirportMETForecast Service to Operational Activities Mapping diagram	14
Figure 4: NSOV-2 AirportMETForecast Service Interface Definition diagram	15
Figure 5: NSOV-2 AirportMETForecast Service Interface Parameter Definition diagram	17
Figure 6: NSOV-5c AirportMETForecast Service Event Trace Description	24

Executive summary

This document is the result of the “Service Design” step of the B.4.3 Working Method on Services for the AirportMETForecast Service. The document provides a comprehensive logical specification for system engineers on how to realize the dissemination of MET data over SWIM.

The service covers the dissemination of customized airport meteorological Forecasts over SWIM. This service therefore aims at bringing the benefits of increased interoperability via SWIM to the MET Community of Interest. Service design has been performed in the context of Service Activity SVA003 entailing Airport Meteorological and Surface Contamination services.

SVA003 has happened in the frame of the SESAR MET Coordination Group and has seen the participation of a good number of different partners, both Operational and System, from OFA5.1.1 (WP6 and WP12) and WP11.2.

Edition 1.0 for this SDD first published as part of ISRM 1.3. It was then updated to 1.1. for ISRM 1.4 and used as reference for SESAR validation exercise EXE-06.03.01-VP-669 (SESAR R5). This edition wraps all quality improvements for delivery with the final SESAR ISRM 2.0.

1 Introduction

1.1 Purpose of the document

The purpose of this SDD is to provide a complete logical description of the AirportMETForecast Service, its operational context, its basic architectural features, its dynamical aspects, its operations and the data provided. All these aspects are presented as model views according to the ISRM UML EATMA Profile, which organize knowledge about a service into views inspired by the NAF Framework.

This SDD serves as a complement to a model based description and supports the configuration management process by providing well-defined baselines.

The logical service model presented in this SDD edition is part of the ISRM 2.0 release, and provides a blueprint which service developers must follow in order to create SWIM-Compliant implementations of the AirportMETForecast Service.

The service presented will be a part of the Service Portfolio. The Service portfolio presents all services that are available or are planned to become available at a high level.

1.2 Intended readership

SESAR Deployment Manager, SCG, the OPS and SYS projects participating in the SVA003 Team, Service Architects, Information Architects, System Engineers and Developers in pursuing architecting, design and development activities.

1.3 Inputs from other projects

N/A

1.4 Glossary of terms

N/A

1.5 Acronyms and Terminology

1.5.1 Acronyms

Term	Definition
ADD	Architecture Description Document
ATM	Air Traffic Management
CC	Capability Configuration
EATMA	European Air Traffic Management Architecture
E-ATMS	European Air Traffic Management System
FAA	Federal Aviation Administration
IER	Information Exchange Requirement

Term	Definition
ISRM	Information Service Reference Model
MET	Meteorology or meteorological
MG	ISRM Modelling Guidelines
NAF	NATO Architecture Framework
NSOV	NATO Service Oriented View
NOV	NATO Operational View
NSV	NATO System View
OSED	Operational Service and Environment Definition
QFE	Altimeter pressure setting relative to airfield elevation
QNH	Altimeter pressure setting code relative to sea level
QoS	Quality of Service
SAR	Service Allocation Report
SCG	Service Coordination Group
SDD	Service Description Document
SESAR	Single European Sky ATM Research Programme
SESAR Programme	The programme which defines the Research and Development activities and Projects for the SJU.
SIR	Service Identification Report
SJU	SESAR Joint Undertaking (Agency of the European Commission)
SJU Work Programme	The programme which addresses all activities of the SESAR Joint Undertaking Agency.
SWIM	System Wide Information Management
UML	Unified Modelling Language
V&V	Validation and Verification
WSDL	Web Services Definition Language
XSD	XML Schema Definition

1.5.2 Terminology

Term	Definition	Source
Capability	Capability is the ability of one or more of the enterprise's resources to deliver a specified type of effect or a specified course of action to the enterprise stakeholders.	EATMA Guidance Material [13]
Capability Configuration	A Capability Configuration is a combination of Roles and Systems configured to provide a Capability derived from operational and/or business need(s) of a stakeholder type.	EATMA Guidance Material [13]
Node	A logical entity that performs Activities. Note: nodes are specified independently of any physical realisation.	EATMA Guidance Material [13]
Service	The contractual provision of something (a non-physical object), by one, for the use of one or more others. Services involve interactions between providers and consumers, which may be performed in a digital form (data exchanges) or through voice communication or written processes and procedures.	EATMA Guidance Material [13]
Service function	A type of activity describing the functionality of a Service.	EATMA Guidance Material [13]
Service interface	The mechanism by which a service communicates	EATMA Guidance Material [13]

2 Service identification

Name	AirportMETForecast
ID	{26FD9FF3-44F2-46ea-BA05-D36393AD1386}
Version	2.0
Keywords	Airport Meteorology, Weather Forecast
Architect(s)	██████████ FINMECCANICA

Lifecycle status	Date	References
Identified	12/12/2013	See reference [3]
Allocated	21/02/2014	See reference [4]
Designed	31/05/2016	This document
Validated	03/03/2016	See reference [16]
IOC	Date for Initial Operational Capability	[Reference to technical enabler hosting the service in the ATM master plan]
FOC	Date for Full Operational Capability	[Reference to technical enabler hosting the service in the ATM master plan]

3 Operational and Business context

The requirements for provisioning of a service for dissemination of the meteorological forecasts of interest for airport operations and the full business and operational context for this service is given by the P06.05.04 OSED[1][2]. It is also been described in the SVA003 Service Identification Report (SIR) [3] and has been elaborated further in the SVA003 Service Allocation Report (SAR) [4]. These documents in particular have already covered:

- a description of what ATM goals and problems the service addresses;
- business level capabilities the service will realise;
- the positioning of the service into the SESAR technical Architecture (ADD and TADs);
- the link to Operational Improvements;
- the list of IERs, operational and non-functional requirements from source documents;
- the relevance to the SESAR MET Coordination Group, and the linkage to the “2013 MET Issue Resolution”;
- the prototyping and validation triggers from within the Programme.

3.1 Information Exchange Requirements

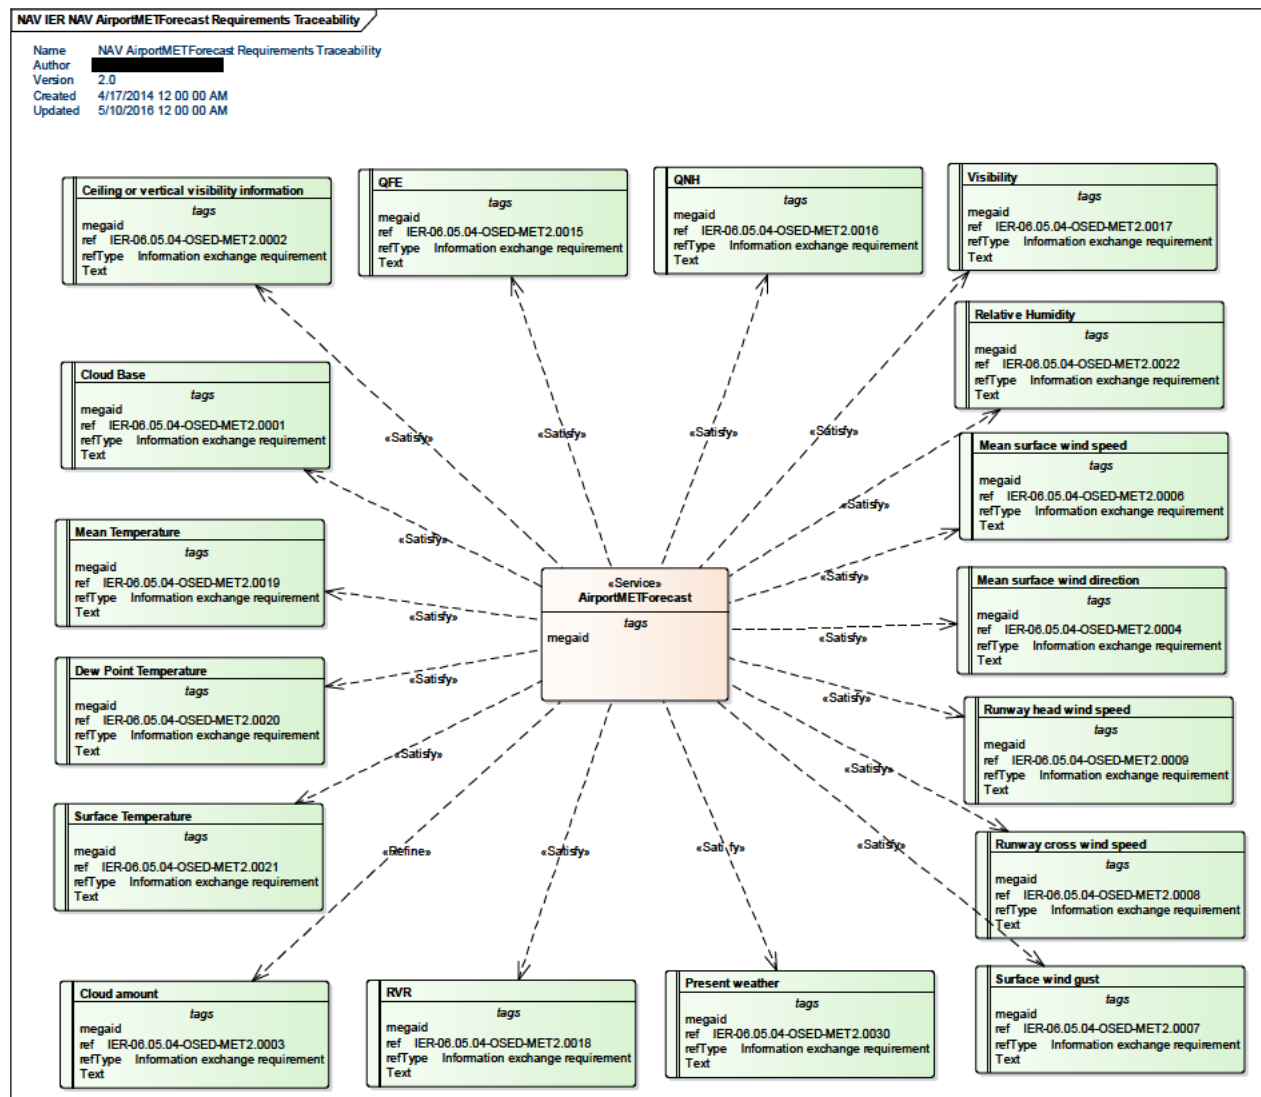


Figure 1: NAV AirportMETForecast Service Requirements Traceability IER Diagram

It has to be noted that for ISRM 2.0 the IERs have not been updated according to more recent versions of the OSED and therefore have been left as they were in the original operational context in the first version of this SDD.

3.2 Other Requirements

3.2.1 Non-Functional Requirements

NA.

3.2.2 Relevant Industrial Standards

NA.

3.2.3 Nodes

The EATMA nodes specified in the service are shown in the NOV-2 AirportMETForecast Service To Nodes Mapping diagram below:

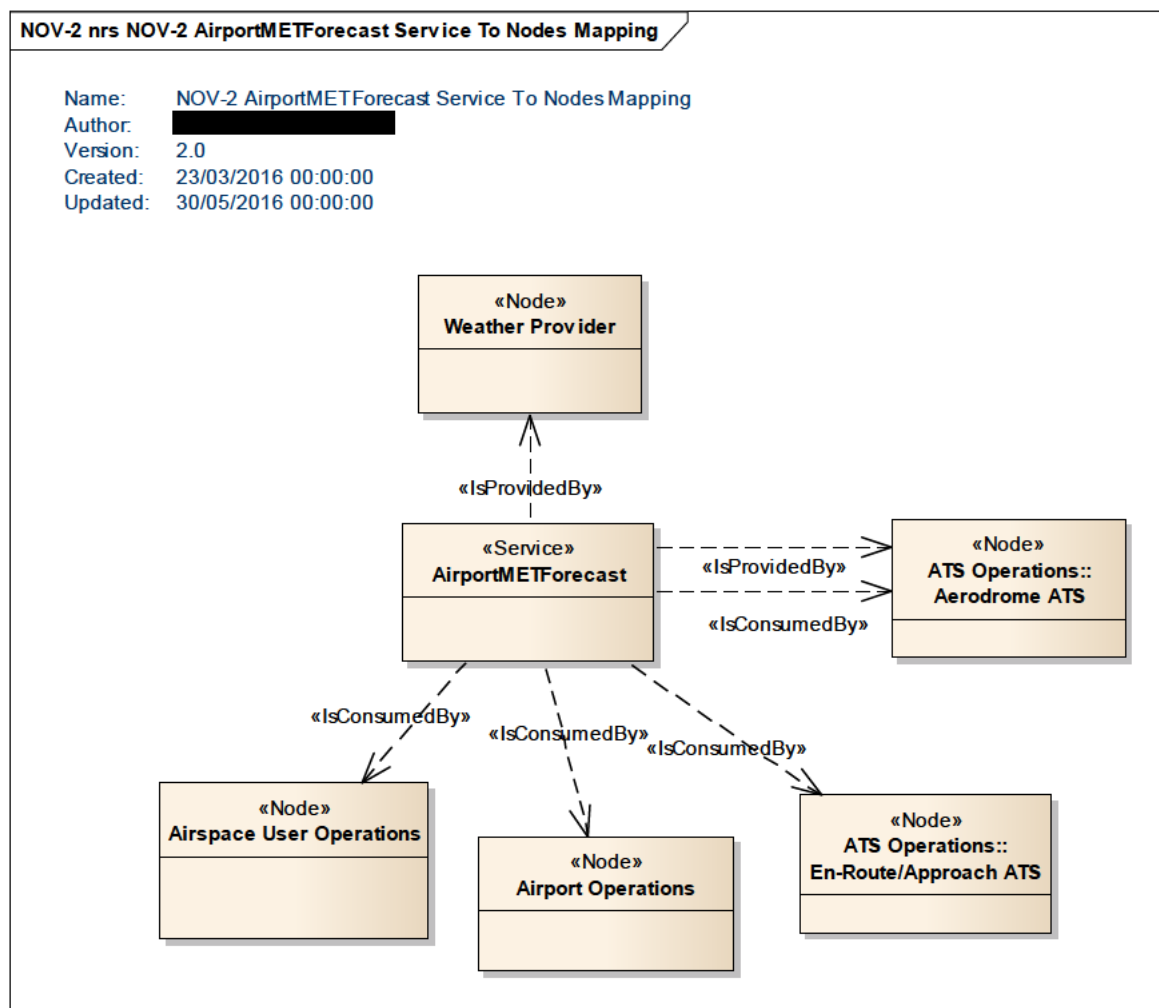


Figure 2: NOV-2 AirportMETForecast Service to Nodes Mapping diagram

4 Service overview

4.1 Service Taxonomy

The service taxonomy is described in the ISRM Service Portfolio document [5].

4.2 Service Levels (NfRs)

NA.

4.3 Service Functions and Capabilities

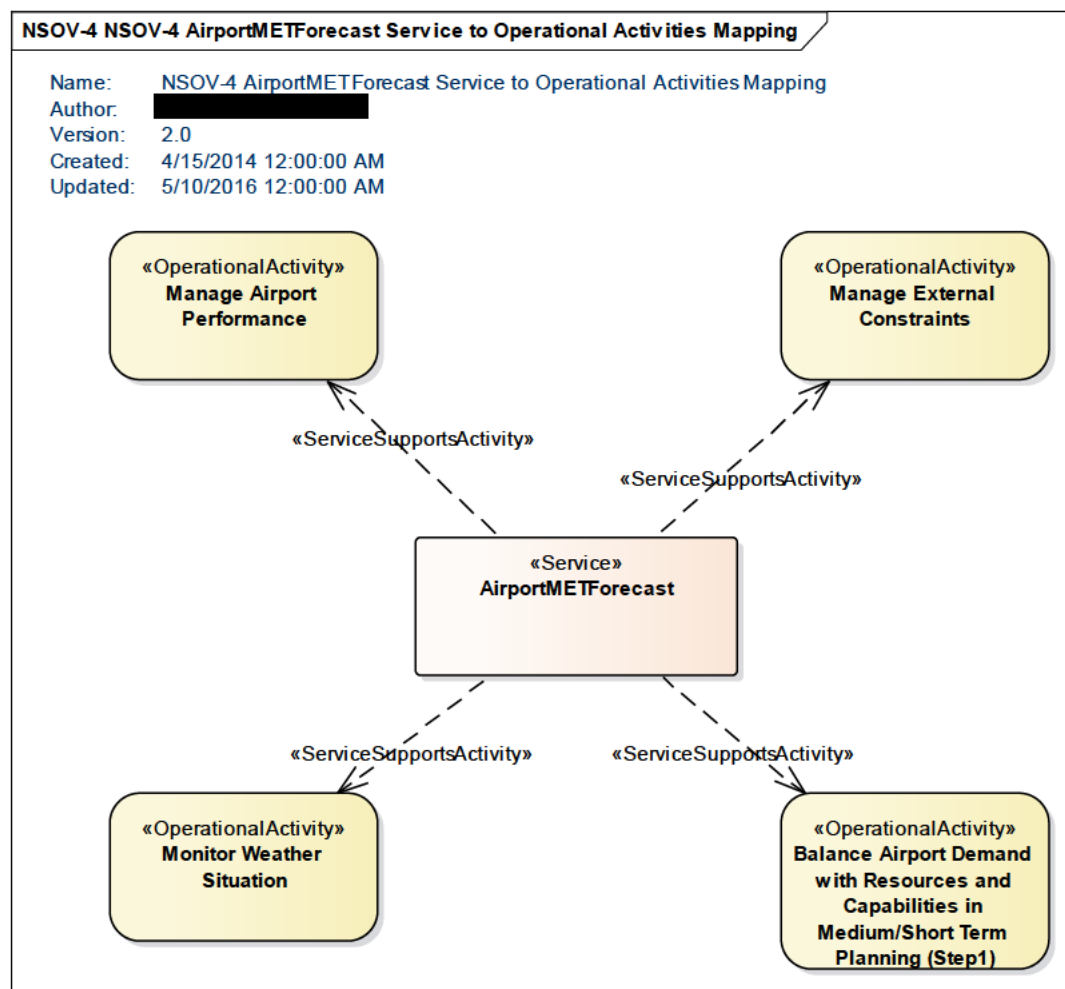


Figure 3: NSOV-4 AirportMETForecast Service to Operational Activities Mapping diagram

For the service to capabilities mapping, see the NSOV-2 Service Interface Definition diagram in Section 4.4.

4.4 Service Interfaces

The service is based on a single pub/sub interface. The AirportMETForecastPublisher service interface definition enables the consumer to subscribe or unsubscribe to the data, while the AirportMETForecastSubscriber service interface definition enables the service provider to publish the message containing the data. The messages for subscription and unsubscription are only logical abstract wrappers, since the actual management of the publication mechanism is done at the level of the SWIM Technical Infrastructure.

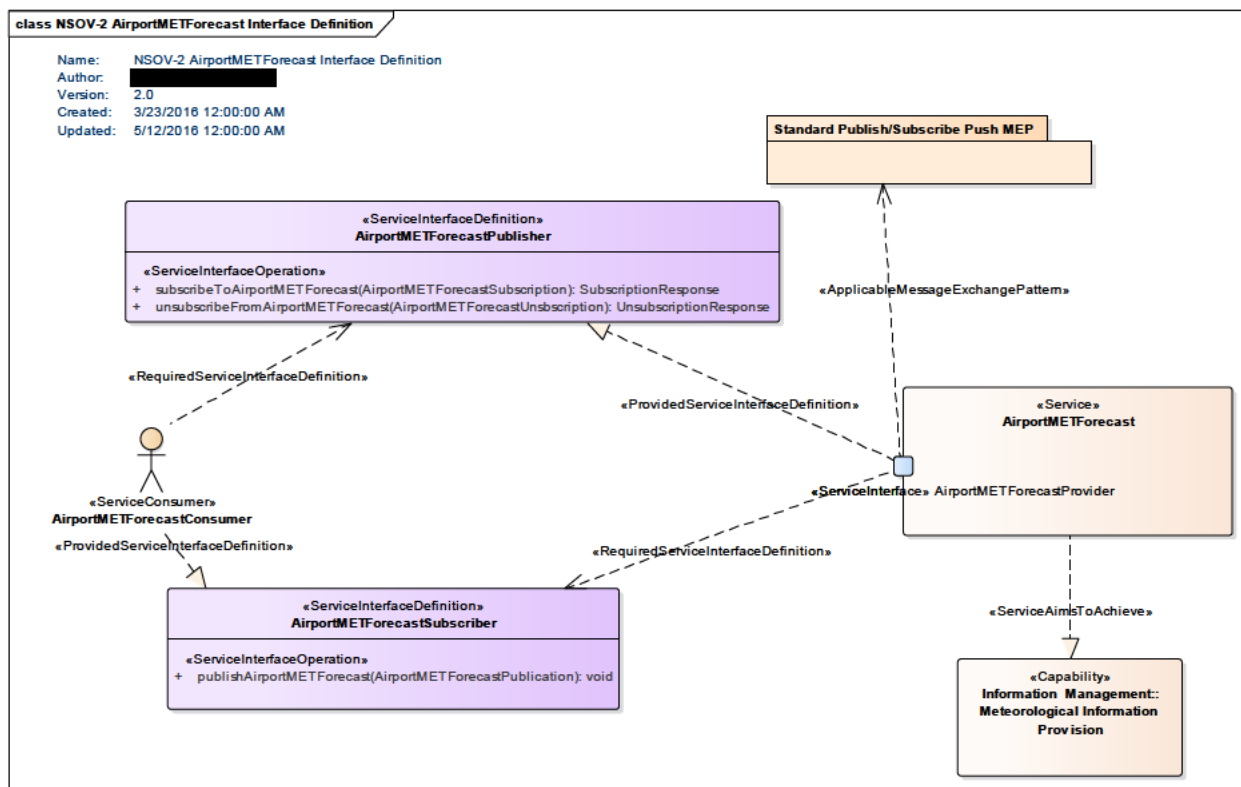


Figure 4: NSOV-2 AirportMETForecast Service Interface Definition diagram

ServiceInterface	ServiceInterfaceDefinition	ServiceInterfaceOperation	Role
AirportMETForecastProvider	AirportMETForecastPublisher	subscribeToAirportMETForecast	provided
AirportMETForecastProvider	AirportMETForecastPublisher	unsubscribeFromAirportMETForecast	provided
AirportMETForecastConsumer	AirportMETForecastSubscriber	publishAirportMETForecast	required

Table 1: Service Interfaces

5 Service interface specifications

5.1 Service Interface AirportMETForecastProvider

This is the only interface for this service. It implements the Standard Publish/Subscribe Push message exchange pattern, and exposes two service interface definitions, one for the provider and one for the consumer side.

5.1.1 Service Interface Definition AirportMETForecastPublisher

This interface definition enables a consumer to subscribe or unsubscribe from the provision of the service message.

5.1.1.1 Operation subscribeToAirportMETForecast

The service operation enables the service consumer to subscribe to a particular airport meteorological Forecast.

5.1.1.1.1 Operation Functionality

The service operation enables the consumer to select the desired airport for which he wants an airport meteorological Forecast.

5.1.1.1.2 Operation Parameters

The operation is modelled with a return type representing the generic outcome for a subscription.

Element Name	Author	Notes
AirportMETForecastSubscription		Message for the Subscription
SubscriptionResponse		Reply to the subscription operation.

Table 2: Payload elements for the subscribeToAirportMETForecast operation

5.1.1.2 Operation unsubscribeFromAirportMETForecast

The service operation enables the service consumer to unsubscribe from the service.

5.1.1.2.1 Operation Functionality

The service operation enables the consumer to select the desired airport for which he does not want airport meteorological Forecast anymore.

5.1.1.2.2 Operation Parameters

The operation is modelled with a return type representing the generic outcome for an unsubscription.

Element Name	Author	Notes
AirportMETForecastUnsubscription		Message for the Unsubscription
UnsubscriptionResponse		Reply to the unsubscription operation.

Table 3: Payload elements for the unsubscribeFromAirportMETForecast operation

5.1.2 Service Interface Definition AirportMETForecastSubscriber

This interface definition enables the provider to publish the AirportMETForecast.

5.1.2.1 Operation publishAirportMETForecast

The service operation enables the service consumer to receive a notification for a new AirportMETForecast which he has subscribed to.

5.1.2.1.1 Operation Functionality

The service operation simply enables the consumer to access a pre-subscribed new AirportMETForecast available from the MET provider.

5.1.2.1.2 Operation Parameters

The operation is modelled without a return type. The operation has a single input parameter which represents the full service payload as represented above.

The relevant EntityItems are described in the table below, each attribute and relationship is described. The tagged values show the linked AIRM class.

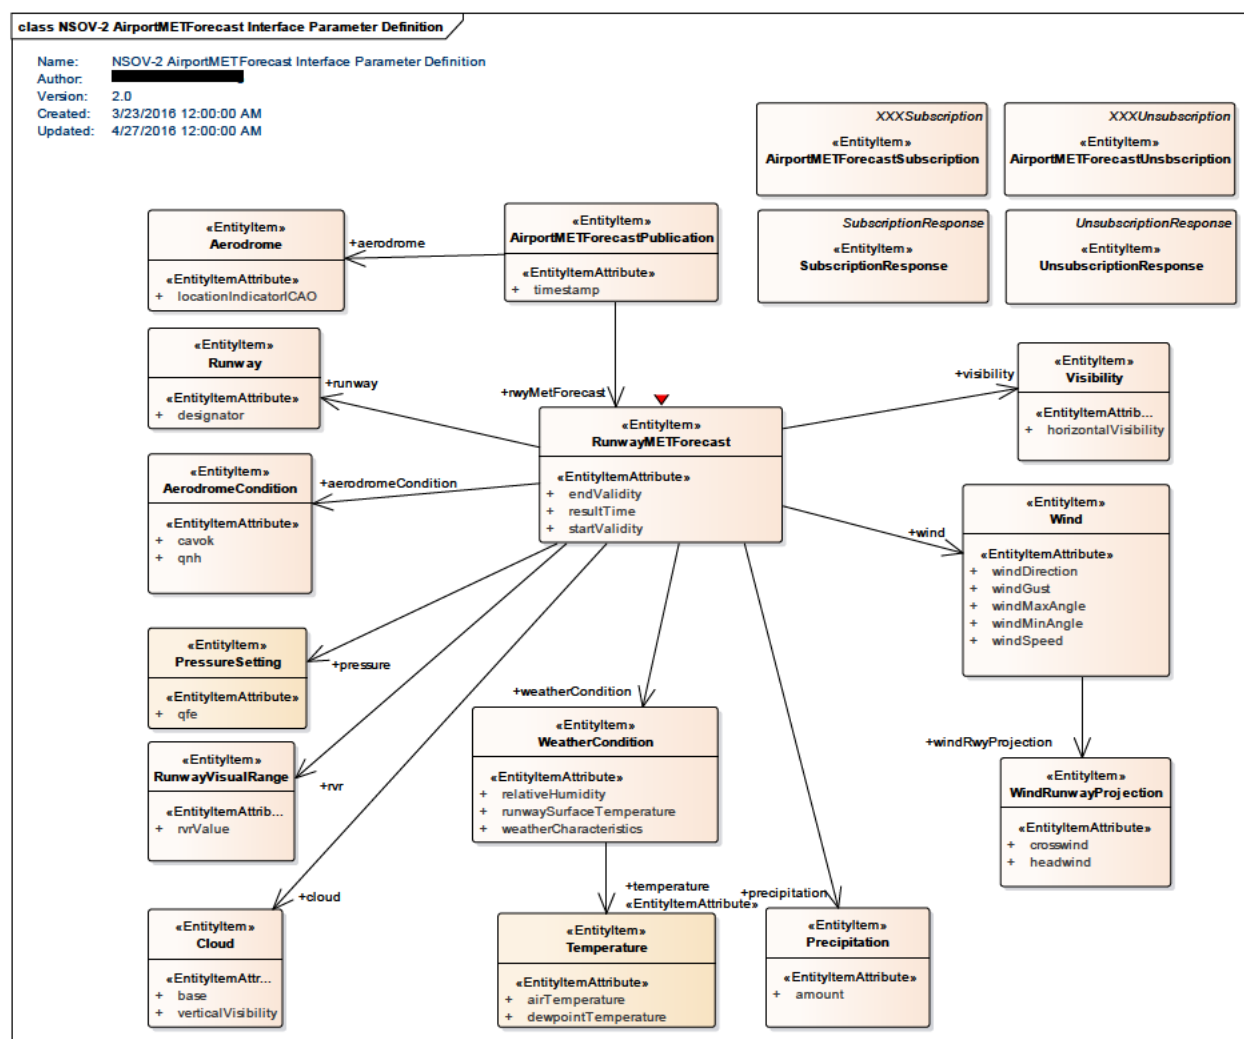


Figure 5: NSOV-2 AirportMETForecast Service Interface Parameter Definition diagram

Element Name		Author	Notes
AirportMETForecastSubscription			Message for the Subscription
	Element Tagged Value Name	Value	
	CLDMSemanticTrace	CLDM_out_of_scope	
Element Name		Author	Notes
AirportMETForecastUnsubscription			Message for the Unsubscription
	Element Tagged Value Name	Value	
	CLDMSemanticTrace	CLDM_out_of_scope	
Element Name		Author	Notes
SubscriptionResponse			Reply to the subscription operation.
Element Name		Author	Notes
UnsubscriptionResponse			Reply to the unsubscription operation.
Element Name		Author	Notes
AirportMETForecastPublication			Publication message
	Element Tagged Value Name	Value	
	CLDMSemanticTrace	CLDM_out_of_scope	
	Attribute Name	Type	Notes
	timestamp		Time at which the message is generated.
	Tagged Value Name	Value	
	CLDMSemanticTrace	urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:Abstract:TemporalEnabledEntity@startEntityLifetime	
Element Name		Author	Notes
RunwayMETForecast			Container of meteorological information of relevance to a runway.
	Element Tagged Value Name	Value	
	CLDMSemanticTrace	CLDM_out_of_scope	
	Attribute Name	Type	Notes
	endValidity		Date and time at which the data contained in the entity state ceases to be effective
	Tagged Value Name	Value	
	CLDMSemanticTrace	urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:Abstract:TemporalEnabledEntity@endValidity	
	Attribute Name	Type	Notes
	resultTime		Time at which the forecast is created.
	Tagged Value Name	Value	
	CLDMSemanticTrace	urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:Abstract:TemporalEnabledEntity@startEntityLifetime	
	Attribute Name	Type	Notes
	startValidity		Date and time at which the data contained in the entity state starts to be effective
	Tagged Value Name	Value	
	CLDMSemanticTrace	urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:Abstract:TemporalEnabledEntity@startValidity	
Element Name		Author	Notes
AerodromeCondition			Weather observations or forecast for an aerodrome.
	Element Tagged Value Name	Value	
	CLDMSemanticTrace	urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:AerodromeCondition	

Attribute Name	Type	Notes
cavok		Ceiling and Visibility OK.
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:AerodromeCondition@cavok	
Attribute Name	Type	Notes
qnh		Q Code corresponding to the derived atmospheric pressure at Mean Sea Level, based on the atmospheric pressure at the reference point converted using the characteristics of the ICAO Standard Atmosphere. It is used as an altimeter setting.
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:AerodromeCondition@qnh	

Element Name	Author	Notes
Aerodrome		A defined area on land or water (including any buildings, installations and equipment) intended to be used either wholly or in part for the arrival, departure and surface movement of aircraft.
Element Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:BaseInfrastructure:AerodromeInfrastructure:Aerodrome	
Attribute Name	Type	Notes
locationIndicatorICAO		The four letter ICAO location indicator of the aerodrome/heliport, as listed in ICAO DOC 7910.
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:BaseInfrastructure:AerodromeInfrastructure:Aerodrome@designator	

Element Name	Author	Notes
Runway		A defined rectangular area on a land aerodrome prepared for the landing and take-off of aircraft.
Element Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:BaseInfrastructure:AerodromeInfrastructure:Runway	
Attribute Name	Type	Notes
designator		The full textual designator of the runway, used to uniquely identify it at an aerodrome/heliport which has more than one. E.g. 09/27, 02R/20L, RWY 1.
Tagged Value Name	Value	

	CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:Subje ctFields:BaseInfrastructure:AerodromeInfrastructure:Runwa y@designator
--	-------------------	---

Element Name	Author	Notes
RunwayVisualRange		Horizontal distance over which a pilot of an aircraft on the centre line of a runway can see the runway surface markings or the lights delineating the runway or identifying its centre line. RVR is normally expressed in metres.
Element Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:S ubjectFields:Meteorology:RunwayVisualRange	
Attribute Name	Type	Notes
rvrValue		Value of the Runway Visual Range
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:Subje ctFields:Meteorology:RunwayVisualRange@rvrValue	

Element Name	Author	Notes
WeatherCondition		Weather observations or forecast of relevance for ATM.
Element Tagged Value Name	Value	
URN	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:S ubjectFields:Meteorology:AviationCondition	
Attribute Name	Type	Notes
relativeHumidity		At a given pressure and temperature, the percentage ratio of the gram-molecular weight of the water vapour to the gram-molecular weight that the air would have if it were saturated with respect to water at the same pressure and temperature.
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:Subje ctFields:Meteorology:AviationCondition@relativeHumidity	
Attribute Name	Type	Notes
runwaySurfaceTemperature		The temperature measured by a probe under the runway surface at the touchdown (TDZ) zone.
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:Subje ctFields:Meteorology:RunwayCondition@temperature	
Attribute Name	Type	Notes
weatherCharacteristics		Characteristics and type of weather according to Annex 3 table A3-1.
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:Subje	

		ctFields:Meteorology:WeatherPhenomenon@phenomenonType
--	--	---

Element Name		Author	Notes
PressureSetting			Weather observations and or forecast for a runway.
	Element Tagged Value Name		Value
	CLDMSemanticTrace		urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:RunwayCondition
	Attribute Name	Type	Notes
	qfe		Q Code corresponding to the atmospheric pressure at the point of reference (generally of an aerodrome). It is used as an altimeter setting.
	Tagged Value Name		Value
	CLDMSemanticTrace		urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:RunwayCondition@qfe

Element Name		Author	Notes
Cloud			Feature describing the cloud conditions for cloud of operational significance.
	Element Tagged Value Name		Value
	CLDMSemanticTrace		urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:Cloud
	Attribute Name	Type	Notes
	base		Altitude of the lowest level of the description of a phenomenon.
	Tagged Value Name		Value
	CLDMSemanticTrace		urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:Cloud@base
	Attribute Name	Type	Notes
	verticalVisibility		Maximum distance at which an observer can see and identify an object on the same vertical as himself, above or below. The vertical visibility should be reported in steps of 30 m (100 ft) up to 600 m (2 000 ft).
	Tagged Value Name		Value
	CLDMSemanticTrace		urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:AviationCondition@verticalVisibility

Element Name	Author	Notes
Precipitation		Any product of the condensation of atmospheric water vapour that falls under gravity. Precipitation is one of the WxPhenomBase. Precipitation is described by an enumeration PrecipitationTypes, and a Boolean "isFreezing".
	Element Tagged Value Name	Value

	CLDMSemanticTrace	urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:Precipitation
Attribute Name	Type	Notes
amount		Precipitation amount.
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:Precipitation@amount	

Element Name	Author	Notes
Wind		Air motion relative to the Earth's surface
Element Tagged Value Name	Value	
CLDMSemanticTrace	urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:Wind	
Attribute Name	Type	Notes
windDirection		The angle representing the direction of the wind source.
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:Wind@windDirection	
Attribute Name	Type	Notes
windGust		Rapid fluctuations in wind speed with a variation of 10 kt or more between peaks and lulls. Wind speed data for the most recent 10 minutes are examined and a gust, the maximum instantaneous wind speed during that 10-minute period, is reported if the definition above is met during that period.
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:Wind@windGust	
Attribute Name	Type	Notes
windMaxAngle		The maximum angle between the two extreme directions between which the surface wind has varied.
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:Wind@extremeClockwiseWindDirection	
Attribute Name	Type	Notes
windMinAngle		The minimum angle between the two extreme directions between which the surface wind has varied.
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x-ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:SubjectFields:Meteorology:Wind@extremeCounterClockwiseWindDirection	
Attribute Name	Type	Notes
windSpeed		The speed of the wind.

	Tagged Value Name	Value
	CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:Subje ctFields:Meteorology:Wind@windSpeed

Element Name	Author	Notes
WindRunwayProjection		Components of the wind vector obtained by its projection on the runway direction.
Element Tagged Value Name	Value	
CLDMSemanticTrace	CLDM_out_of_scope	
Attribute Name	Type	Notes
crosswind		Component of wind that is blowing across the runway
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:Subje ctFields:Meteorology:Wind@crosswind	
Attribute Name	Type	Notes
headwind		Component of wind that is blowing in the opposite direction with respect to the runway direction.
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:Subje ctFields:Meteorology:Wind@headwind	

Element Name	Author	Notes
Visibility		The greatest horizontal distance at which selected objects can be seen, identified, and/or measured with instrumentation.
Element Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:S ubjectFields:Meteorology:HorizontalVisibility	
Attribute Name	Type	Notes
horizontalVisibility		The greatest visibility value, observed in accordance with the definition of “visibility”, which is reached within at least half the horizon circle or within at least half of the surface of the aerodrome. These areas could comprise contiguous or non-contiguous sectors.
Tagged Value Name	Value	
CLDMSemanticTrace	urn:x- ses:sesarju:airm:v410:ConsolidatedLogicalDataModel:Subje ctFields:Meteorology:HorizontalVisibility@prevailingVisibi lity	

Table 4: Payload tracing to AIRM

6 Service dynamic behaviour

The interface offers three operations, namely to subscribe/unsubscribe from the publication of the data, and to notify the consumer on the data being available. The service dynamic behaviour can be shown using the NSOV-5c Service-Event diagram created for the purpose. The following diagram shows that the interaction envisaged between provider and consumer is an asynchronous publish/subscribe “push” type MEP.

6.1 Service Interface AirportMETForecastProvider

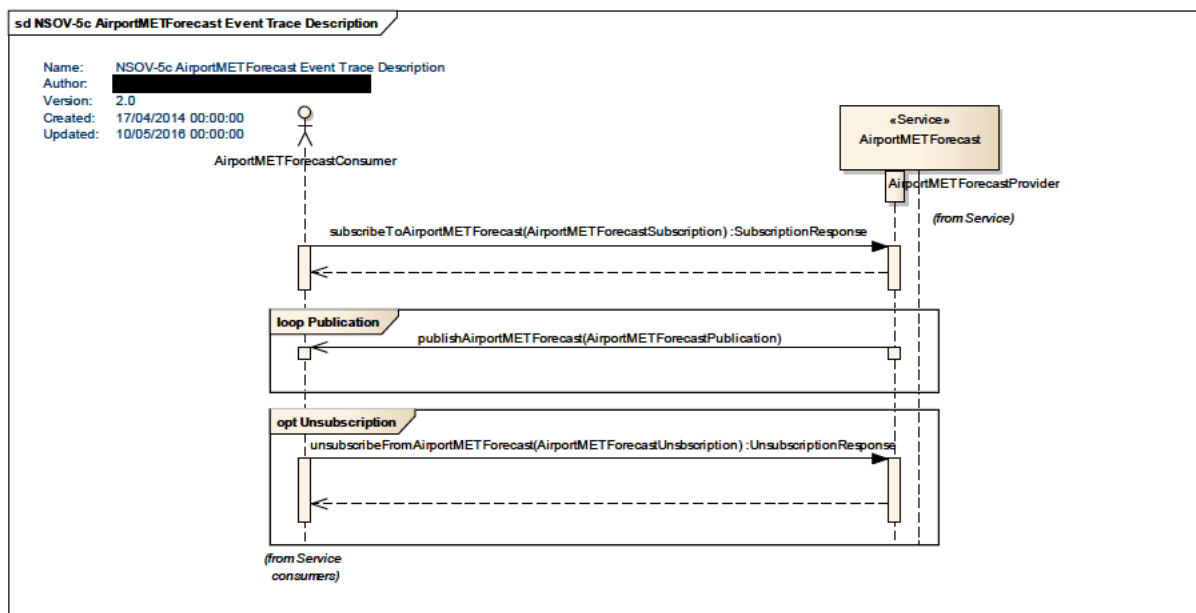


Figure 6: NSOV-5c AirportMETForecast Service Event Trace Description

7 Service provisioning (optional)

Service prototyping has been performed in the context of MET-related validation exercise EXE-06.03.01-VP-669 in SESAR. The technology so far identified for the technical interface is the OASIS standard Web Service Notification and belongs to the SWIM Yellow Profile. The detailed description of the technical service contract and service implementation for these exercises is part of technical deliverables by project 12.7.5.

8 Validation and Verification

8.1 Verification

Verification was performed according to the ISRM Rulebook [11] and the ISRM Verification Guidance [12].

8.1.1 Verification Results

Verification was performed via manual inspection and assisted by a script developed in 8.3.10. The verification outcome is completely free of errors.

Verification reports are in these files “Designed_Services_-_AirportMETForecastService.xls” and “Designed_Services_-_AirportMETForecastService_Common.xls” available in [15].

8.2 Validation

Validation for this service was performed as part of the SESAR validation exercise EXE-06.03.01-VP-669 in Q1 2016. The outcome is recorded in the Validation report [16].

9 References

Name	Version	Document ID / Location
[1] 06.05.04-D16-OFA 05.01.01 Consolidated OSED (Part1)	03.00.00	06.05.04 D16
[2] 06.05.04-D16-OFA 05.01.01 Consolidated OSED (Part2)	03.00.00	06.05.04 D16
[3] Service Identification Report - SVA003	00.01.00	08.03.06
[4] B.4.3 Service Allocation - SVA003	00.00.03	B04.03
[5] ISRM Service Portfolio	00.08.01	08.03.10 D65
[6] Project deliverables template	03.00.00	SJU templates & guidelines package, Project deliverables template
[7] SESAR Operational Service and Environment Definition	03.00.00	SJU templates & guidelines package, OSED template
[8] SESAR Safety and Performance Requirements	03.00.00	SJU templates & guidelines package, SPR template
[9] ISRM Tooling Guidelines	00.07.00	08.03.10 D44
[10] ISRM Modelling Guidelines	00.07.00	08.03.10 D44
[11] ISRM Foundation Rulebook	00.07.00	08.03.10 D44
[12] ISRM Verification Guidelines	00.07.00	08.03.10 D44
[13] EATMA Guidance Material	00.04.02	B04.01 D66
[14] ICAO Annex 3, Meteorological Service for International Air Navigation	17 th Edition, July 2010	www.icao.int
[15] Verification reports for the service	N/A	08.03.10 D65 Verification reports
[16] EXE-06.03.01-VP-669 Validation Report (VALR)	1.0	06.03.01 D140

-END OF DOCUMENT-

founding members



Avenue de Cortenbergh 100 | B -1000 Bruxelles
www.sesarju.eu

28 of 28